


SLM-5650A Satellite Modem

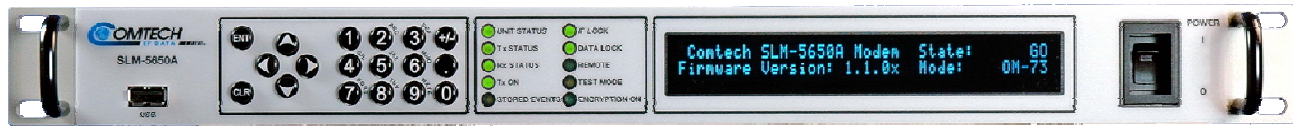

INTRODUCTION

Comtech EF Data's SLM-5650A Satellite Modem is compliant with the strict requirements defined in MIL-STD-188-165A, modem types I, II, IV, V and VI for applications on DSCS, WGS and commercial satellites.

Data rates from 64 kbps to 155 Mbps and symbol rates from 32 ksps to 64 Msps are supported.

The modem provides standard MIL-STD-188-114 (EIA-530 / RS-422), and EIA-613 (HSSI) serial interfaces, and can be optionally configured to support G.703 and Low Voltage Differential Signaling (LVDS) serial interfaces. It can also optionally be equipped with a 4-port 10/100/1000 BaseT Ethernet Network Processor module that supports switching, routing, and advanced Quality of Service protocols.

The SLM-5650A can be integrated with the Vipersat Management System (VMS) to provide fully automated network and capacity management. An AES-256 TRANSEC module, compliant with the FIPS-140-2 NIST standard is also available as an option. All traffic (including overhead and all VMS control traffic) is encrypted when using the TRANSEC module.

Advanced forward error correction (FEC) capabilities are a Comtech EF Data standard feature. Viterbi, Trellis, Concatenated Reed-Solomon, Sequential, and Turbo Product Codes are all supported.

Advanced FEC and modulation capabilities are integrated with the revolutionary DoubleTalk[®] Carrier-in-Carrier[®] bandwidth compression allowing for maximum state-of-the-art performance under all conditions. This combination of advanced technologies enables multi-dimensional optimization, allowing satellite communications users to:

- Minimize required satellite bandwidth
- Maximize throughput without using additional transponder resources
- Maximize availability (margin) without using additional transponder resources
- Enable use of a smaller BUC/HPA and/or antenna
- Or, a combination of the above to meet specific mission needs

The IF interface supports 52-88, 104-176, and 950-2000 MHz frequency ranges.

FEATURES

- MIL-STD-188-165A compliant (Types I, II, IV, V, VI)
- Selectable 70/140 MHz and 950-2000 MHz IFs
- AES-256 TRANSEC, compliant with FIPS-140-2 L2
- Dynamic bandwidth allocation with Vipersat Management System
- DoubleTalk Carrier-in-Carrier bandwidth compression
- BPSK, QPSK, OQPSK, 8-PSK, 16-QAM
- Viterbi, Reed Solomon, Trellis, Sequential, & Turbo Product Code (TPC) FEC
- FEC rates 1/1, 5/16, 1/2, 2/3, 3/4, 5/6, 7/8, and others
- 64 kbps to 155 Mbps
- IESS-308, -309, -310, -315
- ASYNC RS-485 overhead channel & AUPC
- Asymmetrical loop timing & Data Source Bit Synchronization
- Ethernet interface for remote control using HTTP, Telnet and Simple Network Management Protocol (SNMP)
- EIA-485 and EIA-232 interface for remote control

COMPATIBILITY

The SLM-5650A is interoperable with the OM-73, SLM-3650, MD-1352(P)/U (BEM-7650), SLM-7650, SLM-8650, CDM-570, CDM-600/600L, CDM-625, CDD-562, CDD-564, DMD20, and DMD2050 satellite modems.

DATA INTERFACES

The modem supports EIA-530 (RS-422), EIA-612/613 (HSSI) as standard features. Optional interface modules are available to support G.703, LVDS serial, or 4-port Gigabit Ethernet interfaces.

TRANSEC MODULE

An optional transmission security (TRANSEC) module provides bulk AES-256 encryption/decryption in accordance with the FIPS-140-2 Level 2 specification. The TRANSEC module encrypts all traffic sent over the air, including data traffic, overhead channel and Vipersat Management System messages (if present).

TURBO PRODUCT CODING

Turbo coding provides superior error correction performance over Viterbi, Trellis and Reed-Solomon FEC. The SLM-5650A Turbo Product Coding is compatible with Intelsat IESS-315 and Comtech EF Data's CDM-570, CDM-600, CDM-625, SLM-3650, SLM-7650, DMD20, and DMD2050 Satellite Modems and the CDD-562/564 multi-channel demodulators

SLM-5650A Satellite Modem

ASYNCHRONOUS OVERHEAD CHANNEL / AUPC

An asynchronous overhead channel supporting 2 and 4 wire RS-485, as well as RS-232 can be optionally configured. This overhead channel is typically used to support control and monitoring of equipment external to the modem in a remote network. The ASYNC overhead channel can be provisioned in conjunction with any of the supported traffic interfaces (RS-422, HSSI, G.703, LVDS or Ethernet). Automatic Uplink Power Control (AUPC) is available to maintain a desired Eb/No at the demodulator despite link fades due to excessive rain or other power level variations.

NETWORK PROCESSOR OPTION

The Network Processor (NP) module provides a wide variety of advanced Internet Protocol (IP) features including routing, switching, Quality of Service, and Vipersat dynamic bandwidth control.

Networking

With the NP module installed, the modem can be configured as an Ethernet switch or as a high-speed router.

Multicast

Multicast traffic forwarding is supported via Internet Group Management Protocol Version 2 (IGMPv2).

Flow Control

Flow Control is supported via Ethernet Pause Frames

Quality of Service (QoS)

The NP module supports multi-level QoS to reduce jitter and latency for real time traffic, provide priority treatment to mission critical applications and allow non-critical traffic to use the remaining bandwidth. Supported functionality includes differentiated services code point (DSCP) in accordance with RFCs 2474 and 2475, Expedited Forwarding in accordance with RFC 3246, and Per Hop Behavior in accordance with RFC 3247.

VMS Bandwidth Management

The Vipersat Management System (VMS) is the engine that provides dynamic Single Carrier per Channel (dSCPC) bandwidth management of the space segment.

When a remote in the network has an application to transport over the satellite link, dSCPC technology provides the mechanism to automatically establish the SCPC carrier for that transmission. dSCPC resizes the carrier based on the increase or decrease in applications being sent over the link, and it returns the remote to its home state once the application is completed. dSCPC yields true bandwidth-on-demand, giving the user the low-latency, low-jitter dedicated SCPC connection when it is needed for real-time applications, such as Voice over IP (VoIP), video conference, broadcasts and large applications (file or image transfers).

VMS automates bandwidth utilization while optimizing space segment efficiency. It allows intelligent management of satellite networks through port and system configuration and alarm management of the protocol, modem, RF equipment and IP broadband networking. The graphical user interface of VMS enables centralized network configuration and management. It provides auto-detection of satellite modems, configuration and monitoring of the modems, and real-time views of network health and transmission quality. These allow operators to easily configure and monitor dynamically controlled networks. The VMS can be configured to dynamically allocate satellite network capacity in a variety of ways. Supported modes for capacity allocation include:

- (1) Entry channel mode, which allows a modem to automatically enter/exit a network, sets a fixed capacity for the terminal when in the network.
- (2) Load: Capacity allocation based on load demand of terminals on the network.
- (3) Type of Service (ToS): Type and priority based allocation using DiffServ Code Point (DSCP) fields.

EXPANDED DYNAMIC RANGE

The modem exceeds the MIL-STD-188-165A input signal dynamic range requirements by extending the low signal input level requirement of -55 dBm to down to -70 dBm for lower baud rate carriers.

REDUNDANCY

Ultra high reliability, redundant configurations are supported in conjunction with Comtech EF Data's CRS-311 and CRS-300 switches. The CRS-311 can be configured to support 1:1 redundancy for any SLM-5650A configuration. The CRS-300 provides the same functionality for 1:N redundant system architectures.

NETWORK MANAGEMENT / REMOTE CONTROL

The modem supports access to network management information via HTTP using a standard web browser. SNMP and Telnet remote control is also supported. The modem includes separate Ethernet and EIA-485/EIA-232 remote control interfaces. Remote control can also be accomplished via the Ethernet ports of the optional Network Processor. Secure network management via Secure Sockets Layer (SSL) is available as an option.

SLM-5650A Satellite Modem

DOUBLETALK CARRIER-IN-CARRIER

DoubleTalk Carrier-in-Carrier, based on patented "Adaptive Cancellation" technology, allows transmit and receive carriers of a duplex link to share the same transponder space.

Figure 1 shows the typical full duplex satellite link, where the two carriers are adjacent to each other. Figure 2 shows the typical DoubleTalk Carrier-in-Carrier operation, where the two carriers are overlapping, thus sharing the same spectrum.

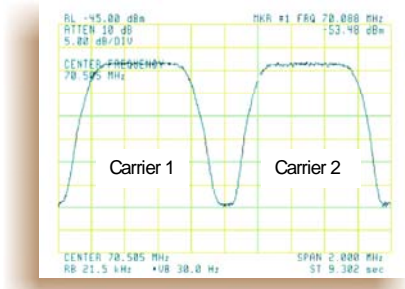


Figure 1. Typical Duplex Link

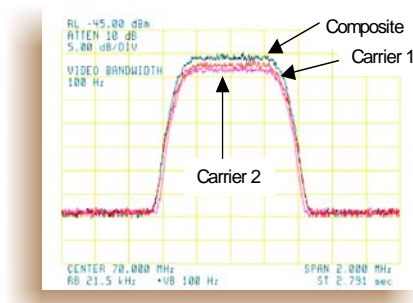



Figure 2. Duplex Link with DoubleTalk Carrier-in-Carrier

DoubleTalk Carrier-in-Carrier is complementary to all advances in modem technology, including advanced FEC and modulation techniques. As these technologies approach theoretical limits of power and bandwidth efficiency, DoubleTalk Carrier-in-Carrier utilizes advanced signal processing techniques to provide a new dimension in bandwidth and power efficiency.


DoubleTalk Carrier-in-Carrier can be used to save transponder bandwidth and/or transponder power thereby allowing successful deployment in *bandwidth-limited* as well as *power-limited* scenarios.

The following example illustrates the typical process for implementing DoubleTalk Carrier-in-Carrier in a *power-limited* scenario:


The conventional link is using 8-PSK, TPC 3/4:



Switching to LDPC and using a lower code rate – for example 8-QAM, LDPC 2/3 increases the total transponder bandwidth, while reducing the total transponder power:



Now using DoubleTalk Carrier-in-Carrier, the second carrier can be placed over the first carrier – thereby significantly reducing the total transponder bandwidth and total transponder power when compared to the original side-by-side 8PSK, TPC 3/4 carriers:

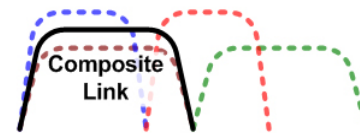

DEMODULATION ONLY & ASYMMETRIC DATA RATES

In order to cost effectively support Hub-Spoke networks, two cost saving configurations are supported. First, the SLM-5650A is available in a demodulation-only version (SLM-5650AD). This configuration is often used as a Hub demodulator. Hub-Spoke networks using the CDD-564 multi-channel demodulators are also supported.

There is also a reduced cost configuration option that allows the remote modems to receive a large shared outbound and transmit a smaller return channel.



SLM-5650A

SLM-5650A Satellite Modem

SYSTEM

Operating Frequency Range	52 to 88 MHz, 104 to 176 MHz, 950 to 2000 MHz in 100 Hz steps
Modulation Types	BPSK, QPSK, OQPSK, 8-PSK, 16-QAM
Digital Data Rate	EIA-530: 64 kbps to 20 Mbps, 1 bps steps EIA-613: 64 kbps to 51.84 Mbps, 1 bps steps Gigabit Ethernet: 64 kbps to 155 Mbps
Symbol Rate	32 ksp/s to 64 Msps
External Reference Input	TNC connector, 1, 5, or 10 MHz, selectable
INT REF Stability	1×10^{-7}
Scrambling	V.35, OM-73 and Synchronous.
IDR/IBS Framing Compatibility	Support for IDR and IBS framing. Allows basic IDR/IBS open network compatible operation.
Built-in Test (BIT)	Fault and status reporting, BER performance monitoring, IF loopback, programmable test modes, built in Fireberd emulation allows comprehensive BER measurements.
Summary Faults	Reported via Front Panel LEDs, 15-pin D sub, FORM C relay contacts for Tx, Rx, Common equipment faults, and Tx and Rx Alarms.
Unit Management	EIA-485, EIA-232, 10/100 Base-T Ethernet with HTTP, Telnet and SNMP

MODULATION

Output Power	+10 to -40 dBm, adjustable in 0.1 dB steps
Output Return Loss	14 dB (70/140 MHz) 9 dB (L-Band)
Output Impedance	50 Ω
Spurious	From Carrier + Symbol Rate to 500 MHz -51 dBc
Harmonics	From Carrier (CW) to 4000 MHz -60 dBc
Tx Clock Source	INT, Tx Terrestrial, and Data Source Sync, Rx Satellite
Output Connectors	TNC for 52 to 88 MHz, 104 to 176 MHz Type "N" for 950 to 2000 MHz

DEMODULATION

Input Power:	
Desired Carrier	+10 to -55 dBm carrier (SR > 3.2 Msps) -55 - $10\log(\text{SR} / 3.2)$, (SR < 3.2 Msps)
Maximum Composite	+20 dBm or +40 dBc
Input Impedance	50 Ω
Input Connectors	TNC for 52 to 88 MHz, 104 to 176 MHz Type "N" for 950 to 2000 MHz
Carrier Acquisition Range	± 30 kHz, selectable
Input Return Loss	14 dB (70/140 MHz) 9 dB (L-Band)

Buffer Clock	INT, Tx Terrestrial, Rx Satellite
Doppler Buffer	32 to 16,777,216 bits, selectable

CODING OPTIONS

Uncoded	Standard	1/1
Viterbi	Standard	K=7, 1/2, 3/4, and 7/8 rates
Viterbi & Reed-Solomon	Standard	Closed Network, per IESS-308 and IESS-309
Trellis	Standard	Per IESS-310
Trellis and Reed-Solomon	Standard	Per IESS-310
Sequential	Optional	1/2, 3/4, and 7/8 rates
Turbo	Optional	TPC Per IESS-315

AVAILABLE OPTIONS

How Enabled	Option
FAST	Data Rates to 10, 20, 52 or 155 Mbps
FAST	8-PSK and 16-QAM
FAST	Turbo to 10, 20, 52 or 155 Mbps
FAST	Vipersat Management System
FAST	Diff-Serv QoS
FAST	Secure Network Management (SSL)
FAST	ASYNCRS-485/232 Overhead channel / AUPC
FAST	Sequential FEC
FAST	DoubleTalk Carrier-in-Carrier
FAST	Asymmetric Tx/Rx Data Rate Levels
Hardware	G.703 Data Interface
Hardware	LVDS Data Interface
Hardware	TRANSEC Module
Hardware	Gigabit Ethernet Network Processor
Hardware	24 VDC Power Supply

ENVIRONMENTAL AND PHYSICAL SPECIFICATIONS

Prime Power	90 to 264 VAC, 47 to 63 Hz, 24 VDC optional
Mounting	1 RU
Size	19W x 19D x 1.71H inch (48W x 48D x 4.3H cm)
Weight	< 10 lbs. (6.8 kg)
Temperature, Operating	0 to 50°C (32 to 122°F)
Temperature, Storage (Non-operational)	-40 to +70°C (-40 to 158°F)
Humidity	0 to 95%, non-condensing


SLM-5650A Satellite Modem



BER PERFORMANCE

Example Modes and Performance

Mod / FEC	Code Rate	Eb/No Guaranteed (Typical)				Data Rate Range [kbps]
		10 ⁻⁶	10 ⁻⁷	10 ⁻⁸	10 ⁻¹⁰	
Legacy Modes						
QPSK VIT	1/2	6.1 (5.7)	6.7 (6.2)	7.2 (6.6)	-	64 - 30,000
QPSK VIT	3/4	7.5 (6.9)	8.2 (7.6)	8.8 (8.3)	-	64 - 45,000
QPSK VIT	7/8	8.6 (7.9)	9.2 (8.5)	10.2 (9.4)	-	64 - 51,840
QPSK VIT R-S	1/2	4.1 (3.6)	4.2 (3.8)	4.4 (4.0)	5.0 (4.6)	64 - 27,333
QPSK VIT R-S	3/4	5.6 (4.9)	5.8 (5.1)	6.0 (5.3)	6.3 (5.6)	64 - 41,340
QPSK SEQ	1/2	5.0 (4.5)	5.4 (4.9)	5.8 (5.3)	-	64 - 2,500
QPSK SEQ	3/4	5.9 (5.4)	6.4 (5.9)	6.8 (6.3)	-	64 - 3,750
QPSK SEQ	7/8	7.3 (6.8)	7.8 (7.3)	8.4 (7.9)	-	64 - 4,375
8-PSK TRE	2/3	7.3 (6.8)	8.1 (7.6)	8.8 (8.3)	-	256 - 51,840
8-PSK TRE R-S	2/3	6.2 (5.7)	6.5 (6.0)	6.7 (6.2)	7.3 (6.8)	256 - 51,840
Turbo Modes						
BPSK TPC	5/16	2.5 (2.0)	2.8 (2.3)	3.1 (2.6)	3.4 (2.9)	64 - 20,000
BPSK TPC	21/44	3.3 (2.8)	3.4 (2.9)	3.5 (3.0)	3.7 (3.2)	64 - 30,545
QPSK TPC	21/44	3.3 (2.8)	3.4 (2.9)	3.5 (3.0)	3.7 (3.2)	64 - 61,091
QPSK TPC	3/4	4.1 (3.6)	4.3 (3.8)	4.6 (4.1)	5.5 (5.0)	64 - 96,000
QPSK TPC	7/8	4.5 (4.0)	4.6 (4.1)	4.7 (4.2)	4.8 (4.3)	64 - 112,000
8-PSK TPC	3/4	6.5 (5.8)	6.9 (6.0)	7.2 (6.3)	7.8 (7.3)	64 - 144,000
8-PSK TPC	7/8	7.1 (6.6)	7.2 (6.7)	7.3 (6.8)	7.5 (7.0)	64 - 155,000
16-QAM TPC	3/4	7.6 (7.0)	7.95(7.3)	8.3(7.7)	9.0 (8.5)	64 - 155,000
16-QAM TPC	7/8	8.2 (7.7)	8.35(7.8)	8.5(7.9)	8.8 (8.3)	64 - 155,000

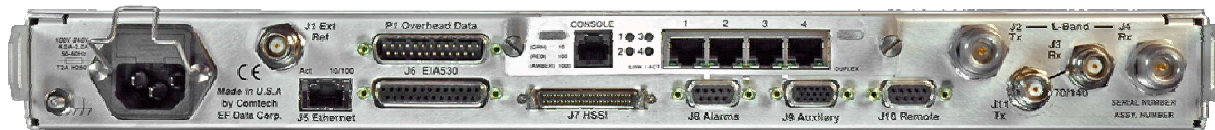

Rear Panel View